

# No. 01 MODA

## Internal Doors

Supremely stylish. Supremely customisable. Supremely you.



### A timeless classic

Moda is based on timeless Shaker style for a simple design that will draw attention to itself.

### Discover your style

Moda is available in 11 designs for ultimate customisation. Whatever your taste, you'll find the Moda for you.

### Noise insulation

Moda features a solid core for brilliant acoustic properties, meaning you can enjoy the quiet, regardless of what's happening on the other side.

### Let light in

Each Moda door design is available with a clear glazed option to draw light into your space and create fluidity throughout your home.

### Charming simplicity

Moda is factory primed for a smooth minimalist aesthetic that can't be overlooked. Its boldness lies in its simplicity.



Stile and rail



Square fitting rails




### Features & benefits:

- Stylish, minimalist design
- Sleek smooth finish
- Factory primed white
- Sound reducing solid core
- 5-year guarantee
- Toughened safety glass on glazed doors

# DOOR DESIGNS

## PANEL

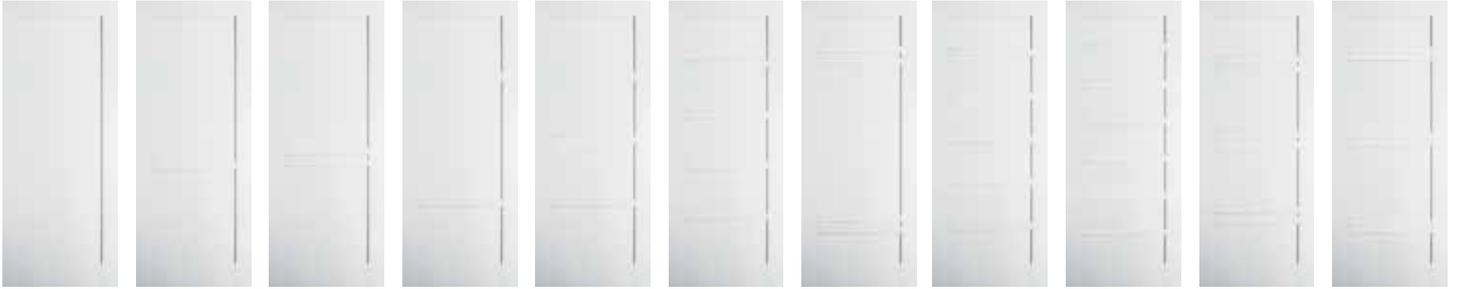

Moda 1   Moda 2   Moda 3   Moda 4   Moda 5   Moda 6   Moda 7   Moda 8   Moda 9   Moda 10   Moda 11

## GLAZED



Moda 1   Moda 2   Moda 3   Moda 4   Moda 5   Moda 6   Moda 7   Moda 8   Moda 9   Moda 10   Moda 11

Width (mm)	Height (mm)	Depth (mm)
610	1981	35
686	1981	35
762	1981	35
838	1981	35

### OPTIONAL PRIMED PAIR MAKER



<b>Material specification</b>	Primed HDF Facing, Solid Particle Board Core
<b>Finish</b>	White primed, requiring final top coat
<b>Glass specification</b>	4mm Clear Toughened Glass
<b>Decoration requirements</b>	It is essential that the door is completely finished on the two faces and all FOUR edges plus any cut-outs for locks, handles and hinges etc. Prior to finishing or sealing, lightly sand any handling marks. Usually 3 top coats are satisfactory but we strongly recommend you that you treat this door in accordance with the paint manufacturer's instructions. A light sanding between coats will provide the best finish. Adequate drying time must be allowed between each coat. Failure to seal the doors accordingly will invalidate any claims.
<b>Storage</b>	Doors must be stored flat in cool, dry conditions avoiding direct contact with sunlight before the door has been finished.
<b>Trimming allowance</b>	If the door is to be reduced in size, an equal amount of timber should be trimmed from either side or bottom, this must never exceed 10mm in total, 5mm each side and 6mm from the bottom. We do not recommend trimming the top of the door.
<b>Guarantees</b>	5 Year Manufacturing
<b>Sustainability</b>	FSC Mix 70%
<b>Additional information</b>	Two doors can be used with a primed Pair Maker to create a pair of doors